SEETRONIC

Product Data Sheet

Product Type Jack

Product Model ST229L

Customer Name

Manufacturer	Prepared	Checked	Approved

Customer	Received	Checked	Confirmed

Above specifications and information may have tolerances and have been updated.
Every effort has been made to ensure correctness upon release of this data sheet.

All Rights Reserved 2023

sales@seetronic-group.com
www.seetronic.com

SEETRONIC

Product Data Sheet

Product Type	**Jack**	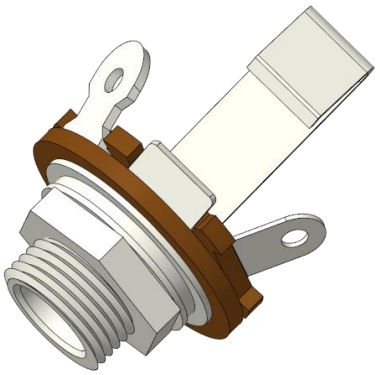
Product Model	**ST229L**	

Product Features
产品特性

- 1/4" mono jack, unswitched
- Finished thread, nut and screw are tightly combined and there is no loosening of the nut

Above specifications and information may have tolerances and have been updated.
Every effort has been made to ensure correctness upon release of this data sheet.

All Rights Reserved 2023

sales@seetronic-group.com
www.seetronic.com

SEETRONIC

Product Data Sheet

Electrical Parameters

Item	Specification
Contact resistance	≤ 10 mΩ
Insulation resistance	> 1000MΩ

Mechanical Parameters

Item	Specification
Service life	> 1000 mating cycles
Insertion force	≤ 40 N

Material and Environmental Parameters

Item	Specification
Contacts	Brass
Contact surface	Sn
Temperature range	-20°C ~ +65°C

Above specifications and information may have tolerances and have been updated.
Every effort has been made to ensure correctness upon release of this data sheet.

All Rights Reserved 2023

sales@seetronic-group.com
www.seetronic.com

SEETRONIC

Product Data Sheet

Product Drawing

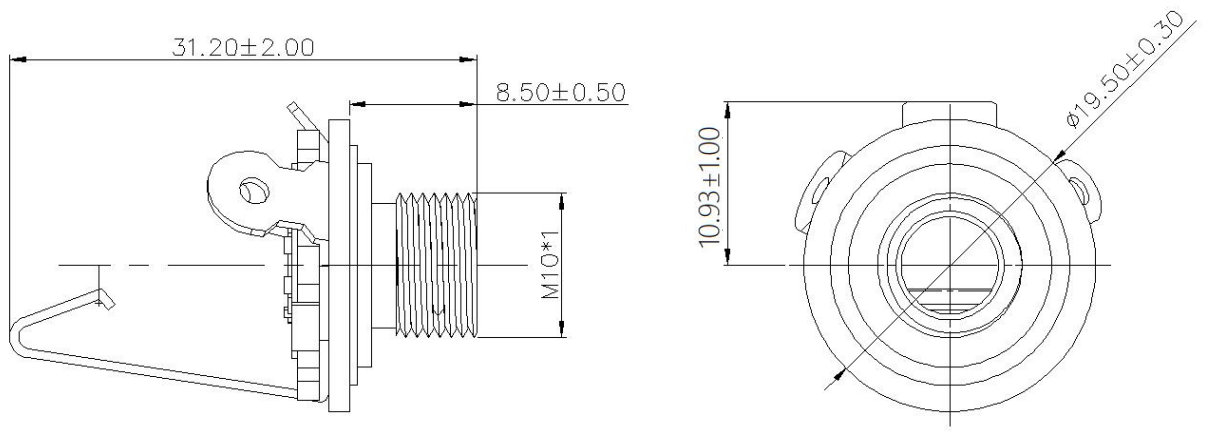

Unit: mm

Packaging Method

1 pc per bag (include 1 pc each of socket, gasket and nut)
100 pcs per inner carton, 5 inner cartons per master carton (500 pcs per master carton)

Accessory

- ☐ No accessories
- ☑ Spacer and Nuts
- ☐ Back fastener plate
- ☐ Other

Above specifications and information may have tolerances and have been updated.
Every effort has been made to ensure correctness upon release of this data sheet.

All Rights Reserved 2023

sales@seetronic-group.com
www.seetronic.com